


Athena Pad Air Series Tablets

PC-Car-Cradle-M1E

Multi-function cradle charger

Spec V1.0

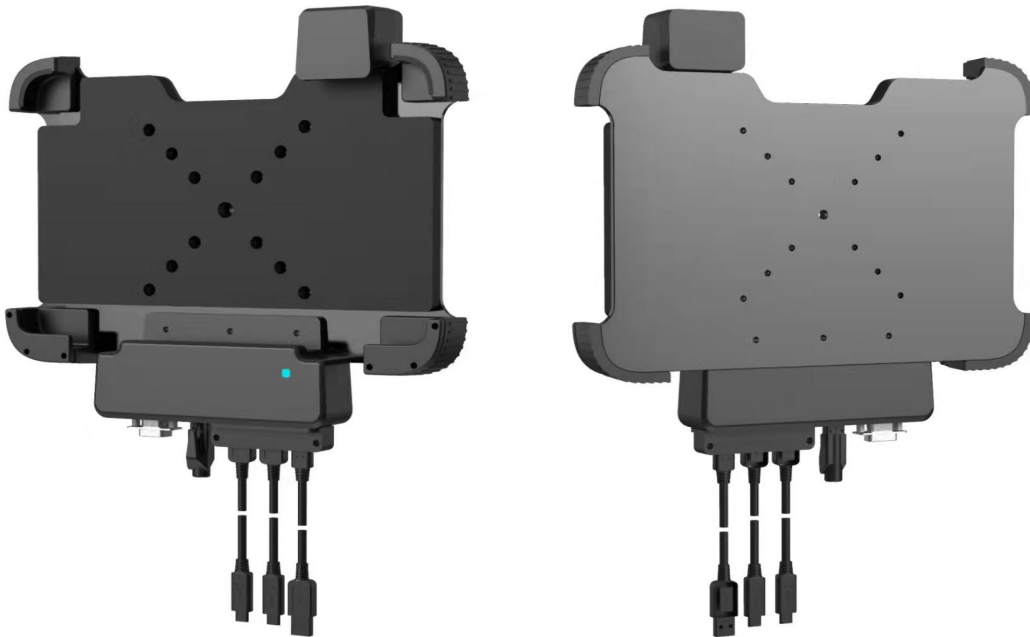

1. PHYSICAL PARAMETERS AND ENVIRONMENTAL PARAMETERS

Rated input voltage	DC 9V-36V \pm 5%
Rated input current	USB C 3A (MAX)
LED indicator	Power status indication
Data interface	USB2.0X2, USB C X 1(Power), RJ45X1, RS232 X 1
range of working temperature	-20°C~ +50°C
Operating humidity range	5% to 95% RH Non-condensing state
Storage temperature	-20°C~ +60°C
Storage humidity	< 95%RH
Cooling method	Natural convection
IP Protection	IP30
Reliability	0.8m fall to the concrete floor
Spring pin connector	On resistance < 100m Ω
Anti-static level	Contact Static Test<8KV
Weight	285g
Dimensions	282.8mm*40.5mm*218.5mm
Standard accessories	Packaging material, screws* (on demand), anti-drop clip set*1

2. INSTRUCTIONS FOR USE

1. Put the whole machine on the multi-function charger;
2. Using AC power, insert the AC plug of the matching power adapter into a standard socket and make it in good contact;
3. The type C end is connected to the base, and the indicator light is red at this time, which means that the power supply of the base is connected;
4. The charging status of the Athena Pad Air series tablets is based on the charging indicator of the FPQ10 series tablets, that is, the red light is on to indicate charging, and the green light is on to indicate that the battery is fully charged.

3. MATTERS NEEDING ATTENTION

- Before using this device, please read the product instructions and product surface markings carefully;
- During use, keep away from heat sources and high voltages, avoid children playing with the device, and do not hit the charger;
- Please keep the pin connector clean, and do not let other metal objects directly touch the pin connector of the charger during use, otherwise it may be dangerous or cause a short circuit and damage the product;
- Do not drop the device to cause impact, or use it in a strong vibration environment to avoid damage or affect the charging effect;
- The device can only be charged with the matching power adapter;
- If there is a fault, please consult your local dealer or our company's customer service center.